



DATASHEET


Telford

Unvented Cylinders



Unvented cylinders are used for supplying high pressure solar pre-heated water at high flow rates to hot water systems.

We can also provide cylinders to your own specification up to 1000 litre capacity.

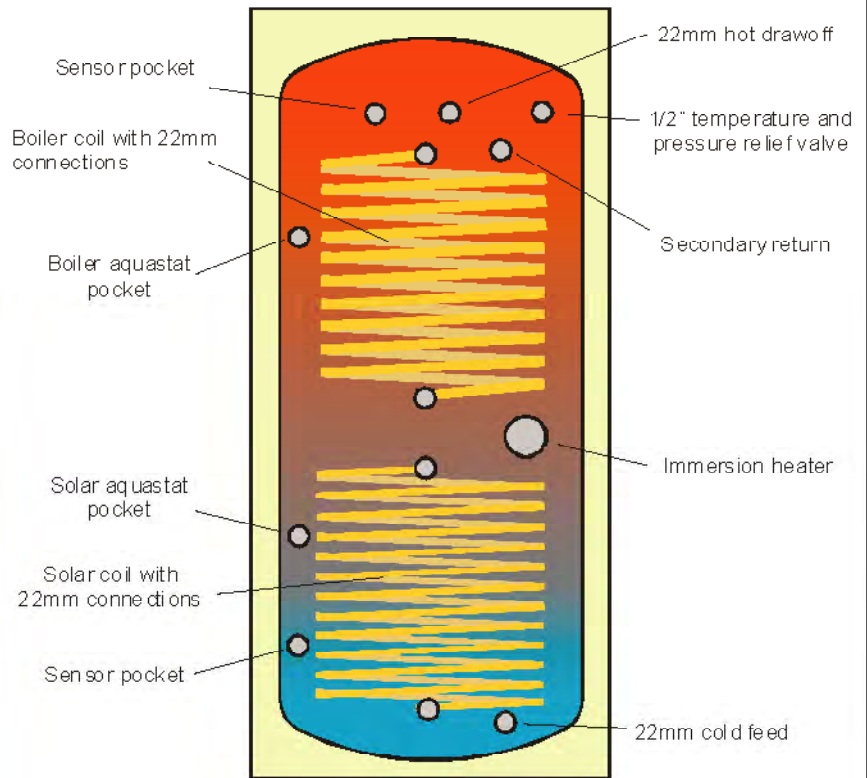

Specification

- Comes complete with mains pressure safety kit (pressure/temp. relief valve & expansion vessel etc).
- Stainless steel cylinder (resistant to corrosion).
- CFC & HCFC free polyurethane foam insulation.
- Mild steel casing with durable white paint finish.
- Up to 55 litres per minute flow rate.
- Should only be fitted by a competent person, as outlined in the Building Regulations, part G3.
- A single coil version is available for use as a pre-heat cylinder.
- An immersion heater is supplied as standard.

Size (all dimensions are external including insulation)

Capacity (litres)	Height (mm)	Diameter (mm)	
125	950	520	(Pre Heat Only)
150	1075	520	(Pre Heat Only)
170	1225	520	
200	1175	570	
250	1375	570	
300	1520	570	

www.imaginationsolar.com

Unit 4 Montpellier Central, Station Road
Bristol BS6 5EE

t: 0117 942 6668 f: 0117 942 8998

e: enquiries@imaginationsolar.com

Reg. in England 4226842

version ds_unv_cylinder_telford_2.1

